SCEB BREAKERS 3 YEAR WARRANTY



HM012T

- Suitable for 0.5-2 tonne machines
- Supplied with moil and chisel tool as standard
- Twin oval tool retaining pins deliver double the service life of a standard pin



HM033T

- Suitable for 3CX, 4CX, 5CX, HYDRADIG 110W & 4.5-8 tonne machines
- Available as top mount, side mount or universal mount
- Supplied with chisel and moil tools as standard
- Topped up using handheld grease gun supplied



HM080T

- Suitable for 11 tonne to 14.5 tonne machines
- Anti-blank fire feature to reduce wear on breaker
- Auto-greasing as standard
- Accumulator to protect the machine from hydraulic pressure spikes
- Available with top or universal mounting



HMI60T

- Suitable for 20-26 tonne machines
- Available as top mount or universal mount
- Auto-greasing as standard
- Anti-blank fire feature to reduce wear on breaker
- Accumulator to protect the machine from hydraulic pressure spikes

JCB BREAKERS 3 YEAR WARRANTY

JCB's contractor breaker range is designed to make an impact, whatever your industry.

- 3 year warranty on all breakers
- Contractor breakers are available for 0.5 to 37 tonne machines
- Accumulator ensures machines are completely protected from hydraulic pressure spikes
- Auto greasing as standard on the HM080T and larger breakers
- Smaller breakers are easily maintained with a hand held grease gun
- The HM054T and smaller breakers are supplied with a moil and chisel as standard. HM080T and larger breakers are supplied with a moil tool
- Can be equipped with a variety of tools including, moil, chisel and blunt
- Available as a universal option for non-JCB machinery
- Our entire contractor range offers continuity of design for ease to the operator
- · Our breakers are fully approved and tested to ensure they work in perfect harmony with your JCB machine

Learn more at: jcb.com






Blunt

ideal for layered concrete, where



Chisel/Transverse Chisel A standard tool for penetrative work in mining, foundations, trenching, demolition etc.

Transverse Chisel

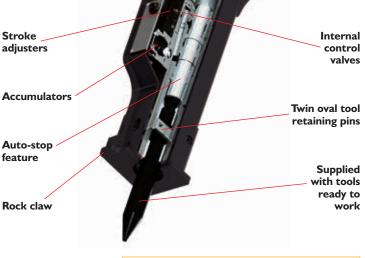

Your nearest JCB dealer

Vibration

system

dampening

BREAKER MODEL	HM012T	HM033T	НМО80Т	НМІ6ОТ
JCB machine fitment	8008 - 8018, 15C - 19C	3CX, 4CX, 5CX, 8052, 8086, 48Z, Hydradig 10W, 100C, JS8	JS115 - JS145 (including JZ variants) JS145W	JS200/210X - JS220/220X (including JZ variants) JS200W
Carrier weight* (tonnes)	0.5 - 2	4.5 - 8	- 4.5	20 - 26
Operating weight** (kg)	120	330	800	1,580
Blow rate - long stroke (bpm)	800 - 1400	380 - 900	350 - 600	320 - 480
Blow rate - short stroke (bpm)	N/A	N/A	600 - 900	400 - 600
Tool diameter (mm)	40	75	95	135
Oil flow (I/min)	12 -> 25	34 -> 76	63 -> 102	115 -> 155
Pressure (bar)	90 - 120	120 - 165	140 - 180	160 - 190
Impact energy*** (j)	300	1,393	3,060	6,135
Auto grease	x	x	\checkmark	\checkmark
Blank fire	x	x	\checkmark	✓
Noise level - boxed (dBA)	N/A	117	119	124
Noise level - side plate (dBA)	110	120	N/A	N/A

Chisel

*Universal models can be fitted on machines within the listed carrier weight range!. ** Operating weights are based on boxed version models except HM012T and HM049T which is based on side plate only. ***The Impact energy figures are based on a calculation and may not be an accurate indication.

Completing the solution: Using a JCB Attachment with a JCB machine provides the ultimate complete package. Please contact your local JCB dealer for further details

#completingthesolution